


ASME CL150/CL300

Wafer Triple Eccentric Butterfly Valves

Fig. 2980W

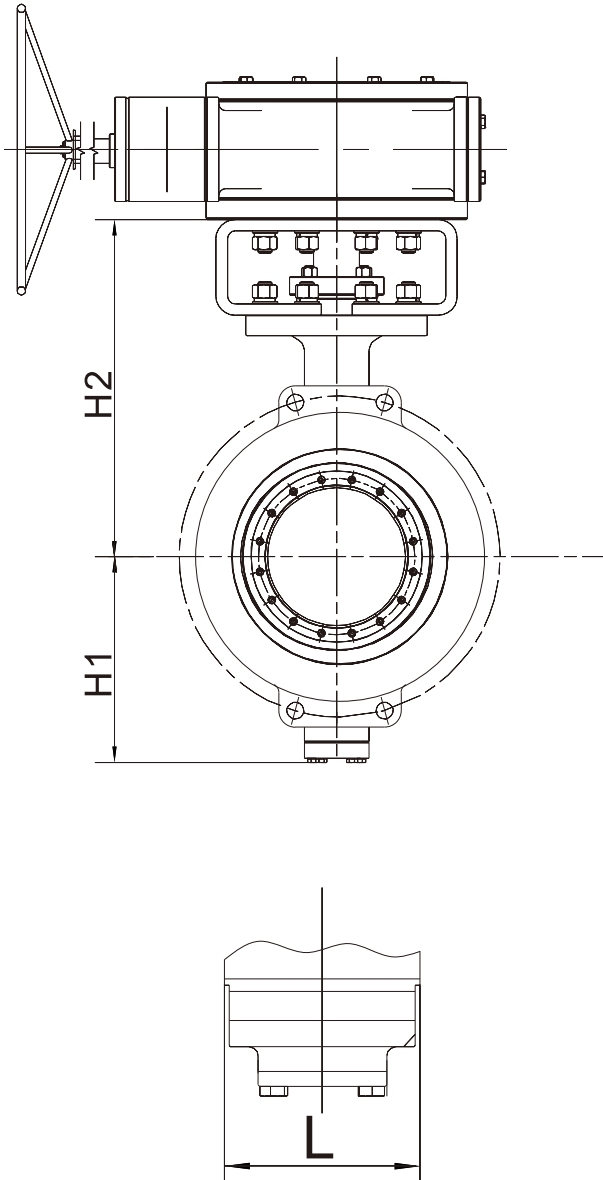

Valve Standard :

Comply with ASME B16.34 / API609

Pressure Temperature Ratings

Working pressure	CL150/CL300
Working Temperature	-60°C to 450°C
Suitable Media	Water,Oil&Gas

Material Specification

Part	Material	ASTM
Body	Carbon Steel	ASTMA216 WCB
	Stainless Steel	ASTMA351 CF8M
	Alloy Steel	ASTMA217 WC6
	Low Temperature Steel	ASTMA352 LCB
Disc	Carbon Steel	ASTMA216 WCB
	Stainless Steel	ASTMA351 CF8
	Alloy Steel	ASTMA217 WC6
	Low Temperature Steel	ASTMA352 LCB
Shaft	Stainless Steel	ASTMA479 410
	Stainless Steel	ASTMA479 XM-19
Body Seat	Stellite 21	
Disc Seal	S31803+Graphite	
	S20910+Graphite	

Dimensions

DN	mm	80	100	150	200	250	300	350	400	450	500	600	700	750	800	900	1000	1050	1200
	inch	3	4	6	8	10	12	14	16	18	20	24	28	30	32	36	40	42	48
CL150	H1	260	290	330	385	425	490	525	545	580	580	690	795	865	865	1000	1130	1130	1267
	H2	125	141	165	214	243	286	312	350	383	414	484	556	611	611	736	801	801	866
	L	48	54	57	64	71	81	92	102	114	127	154	165	190	190	203	216	216	254
CL300	H1	260	290	350	415	455	490	545	575	660	700	785	-	-	-	-	-	-	-
	H2	125	141	189	236	272	310	335	389	422	462	531	-	-	-	-	-	-	-
	L	48	54	59	73	83	92	117	133	149	159	181	-	-	-	-	-	-	-