

Fig. 3233



Valve Standard :
Comply with BS5163 / AWWA C509

Pressure Temperature Ratings

Working pressure	16bar
Testing Pressure	Shell:24bar
	Seat:17.6bar
Working Temperature	-20°C to 110 °C EPDM


Flange Drilled to :

ANSI 150

Material Specification

Part	Material	EN Spec.
Body	Ductile Iron	EN-JS1050
Bonnet	Ductile Iron	EN-JS1050
Disc	EPDM Coated DI	EN-JS1050
Stem	Stainless Stee 420	BS970 420S37
O-Ring	EPDM	Commercial
Wrench Nut	Ductile Iron	EN-JS1050
Hand Wheel	Ductile Iron	EN-JS1050

NOTE :
ONLY DN50-DN300 BS5163 VALVES
ARE WRAS APPROVED.

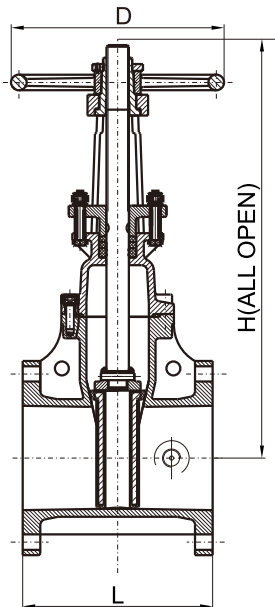

Dimensions

DN inch	2	2-1/2	3	4	5	6	8	10	12	14	16	18	20	24
L	178	190	203	229	254	267	292	330	356	381	406	432	457	508
H	362	402	483	534	661	727	830	1112	1291	1164	1284			
D	180	180	200	200	250	250	320	370	370	450	450	640	640	640

WRAS[®]

Water Regulations Advisory Scheme

This certifies that

GALA RS INC

has had the undermentioned product examined, tested and found, when correctly installed, to comply with the requirements of the United Kingdom Water Supply (Water Fittings) Regulations/Scottish Water Byelaws.

GALA 3243NRS & GALA 3233OS&Y GATE VALVES (DN50 - DN300)


This certificate by itself is not evidence of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Directory (www.wras.co.uk/directory)

The product so mentioned will be listed in the Water Fittings and Materials Directory for a period until:


30 NOVEMBER 2018

1311079

Certificate No.

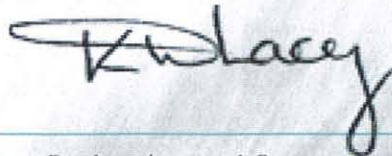

Chairman, Product Approval Group

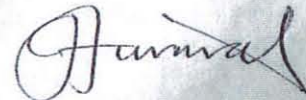

Secretary

WRAS
**APPROVED
PRODUCT**