


FLEXIBLE HOSE

Union Type Flexible Hose

Fig.GF100

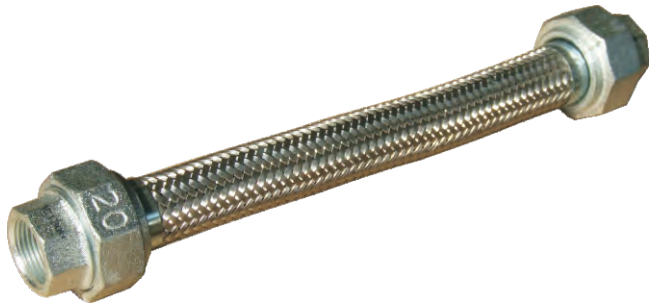

Application

Absorption of the piping strain in the line of water, steam, oil, chemicals, etc., absorption of vibration and ground sinking.


Max. Working Temperature

220°C

Max. Working Pressure

16 kgf/cm²

Construction

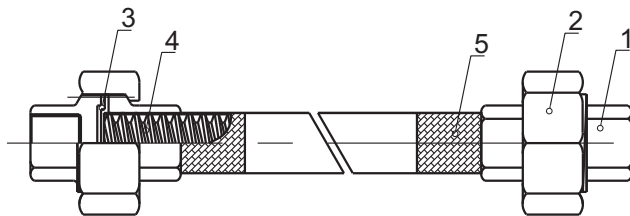

No. Parts	Materials	
1 Union Screw	Mild Steel	
2 Union Nut	Mild Steel	
3 Gasket	Fiber	
4 Flexible Tube	Stainless Steel	
5 Braid	Stainless Steel	

Specification

DN	Nominal Diameter		Overall Length	Lateral Movement
	inch	mm		
15	1/2	300	25	
20	3/4	300	25	
25	1	300	25	
32	1-1/4	300	20	
40	1-1/2	300	15	
50	2	300	20	

Remarks:

Special length available on request.
Higher pressure rating is available.

Distributed by: