


FLEXIBLE HOSE

Union Type Flexible Hose

Fig.GF100H

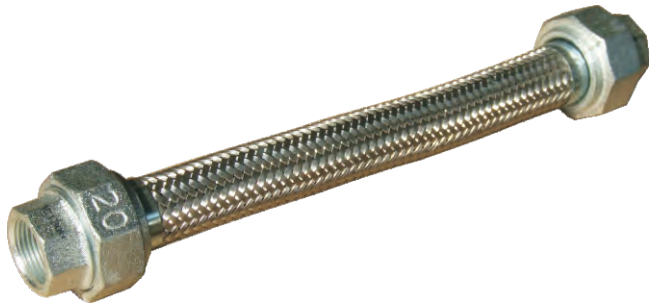

Application

Absorption of the piping strain in the line of water, steam, oil, chemicals, etc., absorption of vibration and ground sinking.


Max. Working Temperature

220°C

Max. Working Pressure

25 kgf/cm²

Construction

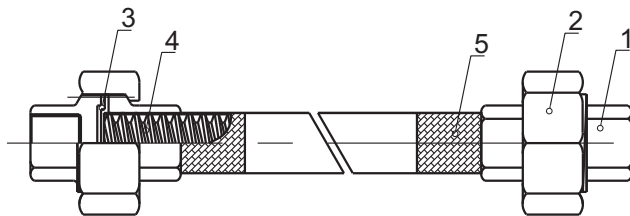

No. Parts		Materials
1	Union Screw	Carbons Steel
2	Union Nut	Carbon Steel
3	Gasket	Fiber
4	Flexible Tube	Stainless Steel
5	Braid	Stainless Steel

Specification

	Nominal Diameter		Overall Length	Lateral Movement
	DN	inch	mm	mm
	15	1/2	300	25
	20	3/4	300	25
	25	1	300	25
	32	1-1/4	300	20
	40	1-1/2	300	15
	50	2	300	20

Remarks:

Special length available on request.
Higher pressure rating is available.

Distributed by: