


FLEXIBLE HOSE

Flange Type Flexible Hose

Fig.GF600

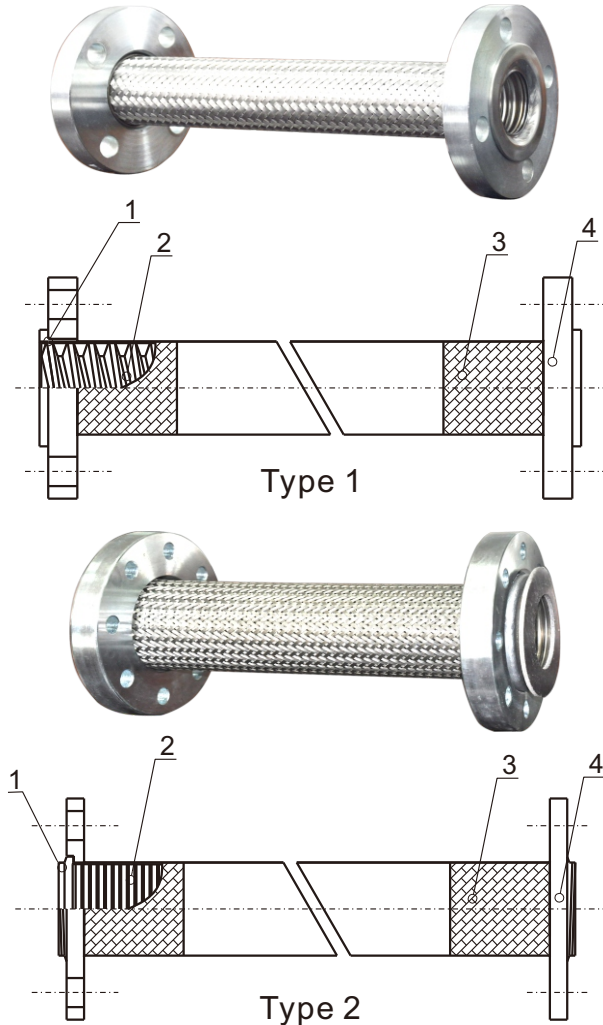

Application

Water, Steam, Turbines, Gas, Fuel Oil, Air, Etc.

Max. Working Temperature

300°C

Max. Working Pressure

16 Bars

Flange Drilling Conform to :

ANSI 125 /150

Testing According to :

GB 1227 / BS 6501 : Part 1

Shell test pressure : 1.5 X Working Pressure

Construction

No.	Parts	Materials
1	Collar	Stainless Steel
2	Bellow	Stainless Steel
3	Braid	Stainless Steel
4	Loose Flange	Carbon Steel

No.	Parts	Materials
1	Ring	Carbon Steel
2	Bellow	Stainless Steel
3	Braid	Stainless Steel
4	Loose Flange	Carbon Steel

Specification

Nominal Diameter		Overall Length	Lateral Movement		Working Pressure
DN	inch		Type1	Type2	
		mm	mm	mm	Kgf/cm ²
15	1/2	300	30	-	16
20	3/4	300	30	30	16
25	1	300	30	30	16
32	1-1/4	300	30	30	16
40	1-1/2	300	25	30	16
50	2	300	20	30	16
65	2-1/2	300	15	30	16
80	3	300	10	30	16
100	4	300	5	25	16
125	5	300	-	20	16
150	6	300	-	20	16
200	8	300	-	10	16
250	10	300	-	5	16
300	12	300	-	5	16
350	14	300	-	2	16
400	16	300	-	2	16

Remarks: Large size and different length available on request.