

Fig. 5306 (DIN3202)




Valve Standard :
Comply with DIN 3202

Pressure Temperature Ratings

Working pressure	16bar
Testing Pressure	Shell:24bar Seal:17.6bar
Working Temperature	-20°C to 110°C EPDM
Suitable Media	Water,Oil&Gas

Flange Drilled to :

ANSI 150

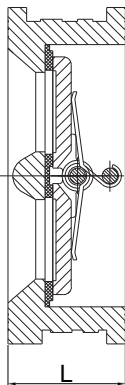

Material Specification

Part	Material	ASTM Spec.
Body	Cast Iron	A126 Class B
Disc	Stainless Steel 304	A351 CF8
Stem	Stainless Steel 316	S31600
Seat-Ring	EPDM	Commercial
Spring	Stainless Steel 316	S31600

Dimensions

DN	mm	50	65	80	100	125	150	200	250
	inch	2	2-1/2	3	4	5	6	8	10
L	mm	43	46	64	64	70	76	89	114
DN	mm	350	400	450	500	600	700	800	—
	inch	14	16	18	20	24	28	32	—
L	mm	127	140	152	152	178	229	241	—



CERTIFICATION MARK

This certifies that

TIANJIN GALAXY VALVE CO LTD

has had the undermentioned product examined, tested and found, when correctly installed, to comply with the requirements of the United Kingdom Water Supply (Water Fittings) Regulations and Scottish Water Byelaws.

5306 SERIES NON RETURN VALVES: DN50-600

The certificate by itself is not evidence of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Directory (www.wras.co.uk/directory)

The product so mentioned will be valid until the end of:

October 2021

1610335

Certificate No.

Handwritten signature of J. Funnell in black ink.

Secretary

Handwritten signature of K. Leisbey in black ink.

Chairman, Product Assessment Group